

## Glossary

A term or expression that is defined in this glossary is marked with the symbol \* when used in the Plan.

A term or expression that is defined in the Resource Management Act 1991 (RMA) and used in the Plan, but which is not included in this glossary, has the same meaning as in the RMA. Definitions provided in the RMA are not repeated in this glossary. A term or expression that is defined in the RMA is marked with the symbol ^ when used in the objectives, policies or rules of the Plan, this glossary and the schedules to the Plan, other than Schedules F, G and I.

When:

- \* is not used to identify a term anywhere in the Plan, or
  - ^ is not used to identify a term in the objectives, policies or rules of the Plan, this glossary or the schedules to the Plan
- the term has its ordinary meaning.

---

**Abrasive blasting** means the cleaning, smoothing, roughening, cutting or removing of part of the surface or any article by the use of a jet of sand, metal shot, grit or any other abrasive material propelled by a blast of compressed air or mechanically via a rotary wheel, impeller or other means.

[General Hearing]

**Abundant** means, for the purposes of Schedule E and this glossary, species that contribute more than most other species to the composition of an area of interest, but are not the *dominant\** species. This is a measure of the contribution to an area of interest (eg., the same habitat type or forest tier) of a species in relation to other species in the same area, and is not simply a frequency count as both biomass and density of a given species are considered.

[Biodiversity and Heritage Hearing]

**Accelerated erosion** means erosion which is caused or accelerated by human activity.

[Land Hearing]

**Active bed** means the *bed^* of a *river^* that is intermittently flowing and where the *bed^* is predominantly unvegetated and comprises sand, gravel, boulders or similar material.

[Land Hearing]

**Agrichemical** means any substance, whether inorganic or organic, man-made or naturally occurring, modified or in its original state, that is used to eradicate, modify or control flora and fauna. For the purposes of this Plan, it includes agricultural compounds but excludes *fertilisers\** vertebrate pest control products and oral nutrition compounds.

[General Hearing]

**Ambient air** means air outside buildings or *structures^*. This does not refer to indoor air, air in a workplace, or discharges of contaminants to air that are authorised by a resource consent.

[General Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Animal effluent** means faeces and urine from animals other than humans, including associated process water, washdown water, contaminants and sludge, excluding *poultry farm litter*.\*

[Water Hearing]

*New Zealand Pork Industry Board ENV-2010-WLG-000151*

**Association** means, for the purposes of Schedule E, a species, or group of species, landform or soil type occurring in space together. Associations can be observed in geographical pattern across the landscape, or in distinctive community groupings.

[Biodiversity and Heritage Hearing]

**Artificial watercourse** means a continually or intermittently flowing body of fresh *water*<sup>^</sup> that does not meet the definition of *river*<sup>^</sup> in s2 of the RMA. For the purposes of this Plan, it includes an irrigation canal, *water*<sup>^</sup> supply race, canal for the supply of *water*<sup>^</sup> for hydroelectricity power generation and farm drainage canal; but excludes a non-natural *lake*<sup>^</sup>.

[Water Hearing]

**At-risk habitat** means an area determined to be an at-risk habitat in accordance with Schedule E and, for the avoidance of doubt, excludes any area in Table E.2(b).

[Biodiversity and Heritage Hearing]

*Meridian Energy Limited ENV-2010-WLG-000149*

*Hancock Forest management (NZ) Limited ENV-2010-WLG-000161*

**Basel Convention** means the Convention of the Control of Transboundary Movements of Hazardous Wastes and Their Disposal, held at Basel on 22 March 1989.

[General Hearing]

**Biofuels** means fuel consisting of a range of biological material derived from plant or animal sources including fats, oils and their derivatives, animal manure, *waste*\* plant material, wood *waste*\*, and *waste*\* treatment plant solids.

[General Hearing]

**Biosolids** means a sewage or sewage sludge, derived from a sewage treatment plant, that does not include *animal effluent*\* or products derived from industrial wastewater treatment plants, and that has been treated or stabilised to the extent that it is able to be safely and beneficially applied to *land*<sup>^</sup>.

[Water Hearing]

**Bore** means any hole, regardless of the method of formation, that:

- (a) is created for the purpose of accessing groundwater, *oil*\* or gas; or
- (b) is created for the purpose of exploring *water*<sup>^</sup>, *oil*\* or gas resources excluding piezometers installed for monitoring purposes.

[Water Hearing]

**Boulderfield** means, for the purposes of Schedule E, *land*<sup>^</sup> in which the area of unconsolidated bare boulders (greater than 200 mm diameter) exceeds the area covered by any one class of plant growth form. Boulderfields are named from the leading plant species when plant cover is 1% or greater.

[Biodiversity and Heritage Hearing]

**Broadleaved** means, for the purposes of Schedule E, woody *tree*\* and *shrub*\* species which flower, excluding the beech species. Common examples of species referred to as broadleaved include, but are not limited to, kamahi, titoki, fuchsia, maire, hinau, tawa, mahoe, and *Coprosma* species. Broadleaved includes the term "broadleaf", which is specific and refers to *Griselina littoralis* or *Griselina lucida*.

[Biodiversity and Heritage Hearing]

**Canopy** means the highest level of foliage within an area of habitat type excluding any emergent individuals. The height of the canopy layer will vary with the structure of the vegetation.

[Biodiversity and Heritage Hearing]

**Chimney** means any *structure*<sup>^</sup> or opening designed for venting the airborne products of combustion.

[General Hearing]

**Cleanfill** means a *landfill*\* that accepts only *cleanfill material*\*.

[General Hearing & Water Hearing]

**Cleanfill material** means materials such as clay, soil and rock, and other inert materials such as concrete or brick that are free of:


- (a) combustible, putrescible (except that *cleanfill material*\* may contain up to 5% by weight putrescible matter), degradable or leachable components
- (b) *hazardous substances*\*
- (c) products or materials derived from *hazardous waste*\* treatment, *hazardous waste*\* stabilisation or *hazardous waste*\* disposal practices
- (d) materials that may present a risk to human health
- (e) liquid *waste*\*.

[General Hearing & Water Hearing]

**Coastal foredune** means the strip of *land*<sup>^</sup> between the *coastal marine area*<sup>^</sup> and a line roughly parallel with the beach, extending 200 metres inland of the first line of vegetation.

[Coast Hearing & Land Hearing]

### COASTAL FOREDUNE AREA

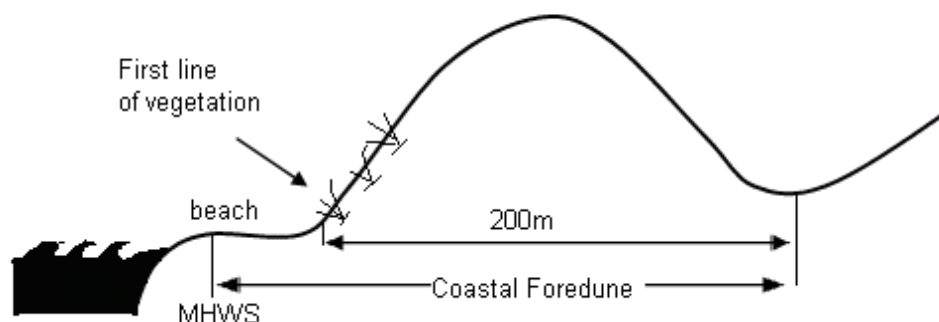

**Common** means, for the purposes of Schedule E and this glossary, species that contribute more to the composition of an area of interest than species that are *scattered\** or *occasional\**, but less than species that are *abundant\** or *dominant\**. This is a measure of the contribution to an area of interest (eg., the same habitat type or forest tier) of a species in relation to other species in the same area, and is not simply a frequency count as both biomass and density of a given species are considered.

[Biodiversity and Heritage Hearing]

**Common catchment expiry or review date** means the date set in Table 11A.1 when all consents within a *Water Management Zone\** are to be reviewed or to expire.

[General Hearing]

**Composting (or compost)** means the biological treatment or decomposition of organic material under controlled conditions to produce a stabilised product which is potentially beneficial to plant growth with compost as the resulting material.

[Water Hearing]

**Continuous** means, for the purposes of Schedule E and this glossary, that an area of habitat type has no interruption of continuity or conspicuous gaps, allowing for small, infrequent *canopy\** gaps (eg., *tree\** fall gaps).

[Biodiversity and Heritage Hearing]

**Critical infrastructure** means *infrastructure^* necessary to provide services which, if interrupted, would have a serious *effect^* on the people within the Region or a wider population, and which would require immediate reinstatement. *Critical infrastructure\** includes *infrastructure^* for:

- (a) electricity substations
- (b) the treatment and storage of *water^* for public supply (excluding the distribution network)
- (c) the management of human sewage treatment (excluding the reticulation system)
- (d) strategic road and rail networks (as defined in the Regional Land Transport Strategy)
- (e) health care institutions including hospitals.

[General Hearing]

**Cultivation** means preparing *land^* for growing pasture or a crop and the planting, tending and harvesting of that pasture or crop, but excludes:

- (a) direct drilling of seed
- (b) no-tillage practices
- (c) recontouring *land^*
- (d) *forestry\**
- (e) the clearance of *woody vegetation\** and *new tracking\** in a Hill Country *Erosion Management Area\**.

[Land Hearing]

**Cumulative nitrogen leaching maximum** means the total kilograms of nitrogen leached per hectare per year for the total area of a farm (including any *land^* not used for grazing) and is calculated using the values for each *land use capability class\** specified in Table 13.2.

[Water Hearing]

**Cushionfield** means, for the purposes of Schedule E, an area of vegetation in which the cover of cushion plants in the *canopy*\* is 20-100% and in which the cushion plant cover exceeds that of any other growth form or bare ground. Cushion plants include *herbaceous*\*, semi-woody and woody plants with short densely-packed branches and closely-spaced leaves that together form dense hemispherical cushions. The growth form occurs in all species of *Donatia*, *Gaimardia*, *Hectorella*, *Oreobolus*, and *Phyllachne* as well as in some species of *Achiphylla*, *Celmisia*, *Centrolepis*, *Chionohebe*, *Colobanthus*, *Dracophyllum*, *Kelleria*, *Haastia*, *Leucogenes*, *Luzula*, *Myosotis*, *Poa*, *Raoulia*, and *Scleranthus*.  
[Biodiversity and Heritage Hearing]

**Dairy farming** means using any area of *land*<sup>^</sup> greater than 4 ha for the farming of dairy cattle for milk production. This includes *land*<sup>^</sup> used as a dairy cattle grazing runoff but excludes any dairy grazing arrangement. A dairy grazing arrangement is a third party commercial arrangement between the owner of dairy cattle and another landowner for the purpose of temporary grazing.  
[Water Hearing]

**Discontinuous** means, for the purposes of Schedule E and this glossary, that an area of habitat type is not *continuous*\* and has distinct interruptions or conspicuous gaps, excluding those gaps created by *tree*\* fall.  
[Biodiversity and Heritage Hearing]

**Domestic wastewater** means wastewater and greywater generated on the *property*\* from toilets, urinals, kitchens, bathrooms, showers, baths, basins, water closets and laundries. It includes such wastewater flows from facilities serving staff/employees/residents in institutional, commercial and industrial establishments and small schools (under 2,000 l/d), but excludes commercial and industrial wastes\*, large-scale laundry activities and any stormwater flows.  
[Water Hearing]

**Dominant (or dominated)** means, for the purposes of Schedule E and this glossary, species that contribute more than any other species to the composition of an area of interest. Dominant species are the most characteristic species of the area of interest or habitat type. This is a measure of the contribution to an area of interest of a species in relation to other species in the same area, and is not simply a frequency count as both biomass and density of a given species are considered.  
[Biodiversity and Heritage Hearing]

**Duneland** means, for the purposes of Schedule E, areas where the landform is characterised by sand dunes (active or stable).  
[Biodiversity and Heritage Hearing]

**Endemic** means a species that is indigenous only to a certain area – eg., the Manawatu-Wanganui Region of New Zealand.  
[Biodiversity and Heritage Hearing]

**Energy efficiency** means a change to energy use that results in an increase in the net benefits per unit of energy.  
[General Hearing]

**Erosion and Sediment Control Plan** means a plan prepared in accordance with the “Erosion and Sediment Control Guidelines for the Wellington Region” dated September 2002.  
[Land Hearing]

*Ernslaw One Ltd ENV-2010-WLG-000146*  
*Hancock Forest management (NZ) Limited ENV-2010-WLG-000161*

**Feedpad** means an area of artificially sealed *land*<sup>^</sup> used principally for feeding animals.

[Water Hearing]

Wellington Fish & Game Council ENV-2010-WLG-000157

**Fernland** means, for the purposes of Schedule E, an area of vegetation in which the cover of ferns in the *canopy*<sup>\*</sup> is 20-100% and in which the fern cover exceeds the cover of any other growth form or bare ground. Tree ferns 10 cm diameter or greater at 1.4 m above the ground are excluded from this definition and are *trees*<sup>\*</sup>.

[Biodiversity and Heritage Hearing]

**Fertiliser** means any substance or mix of substances that is described as or held to be suitable for sustaining or increasing the growth, productivity or quality of plants (or animals indirectly) through the application to plants and soils of:

- (a) the following major nutrients: nitrogen, phosphorus, potassium, sulphur, magnesium, calcium, chloride and sodium
- (b) the following minor nutrients: manganese, iron, zinc, copper, boron, cobalt, molybdenum, iodine and selenium
- (c) non-nutrient attributes of the materials used in fertiliser
- (d) fertiliser additives
- (e) gypsum and lime

but does not include *biosolids*<sup>\*</sup>, *animal effluent*<sup>\*</sup>, *soil conditioners*<sup>\*</sup> or *poultry farm litter*<sup>\*</sup>.

[Water Hearing]

Horticulture New Zealand ENV-2010-WLG-000155

**Fire training** means training undertaken by:

- (a) the New Zealand Fire Service (or under authority of), or
- (b) any Rural Fire Authority (or under authority of), or
- (c) a New Zealand Qualification Authority registered provider accredited for fire training, or
- (d) the New Zealand Defence Force Fire Service (or under the authority of), including the School of Military Engineering.

[General Hearing]

**Flaxland** means, for the purposes of Schedule E, a subclass of *tussockland*<sup>\*</sup> where species of *Phormium* are *dominant*<sup>\*</sup>.

[Biodiversity and Heritage Hearing]

**Flood hazard avoidance** means, for the purpose of Policy 10-2, either:

- (a) ensuring that structures and activities have a finished ground level, which includes a reasonable freeboard, above the 0.5% annual exceedance probability (1 in 200 year) flood level and which allows safe access to and from the structure or activity, or
- (b) ensuring flood control measures are in place that provide protection from the 0.5% annual exceedance probability (1 in 200 year) flood event and those measures are soundly designed and constructed such that there is minimal risk of the measures failing.

[General Hearing]

**Floodway** means an artificial flood control channel which diverts part of the *river's*<sup>^</sup> flow from the *river*<sup>^</sup> during flood periods and which is identified by the maps in Schedule I.

[General Hearing]

**Flow exceedance percentile** means the *river*<sup>^</sup> flow in m<sup>3</sup>/s or l/s that is exceeded for the nominated percentage of time, eg, *river*<sup>^</sup> flow is higher than the 50<sup>th</sup> flow exceedance percentile for 50 percent of the time, but higher than the 20<sup>th</sup> flow exceedance percentile for only 20 percent of the time.  
[Water Hearing]

**Forest** means, for the purposes of Schedule E and this glossary, an area of woody vegetation in which the *canopy*<sup>\*</sup> cover of *trees*<sup>\*</sup> and *shrubs*<sup>\*</sup> is more than 80% and in which *tree*<sup>\*</sup> cover exceeds *shrub*<sup>\*</sup> cover.  
[Biodiversity and Heritage Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Forestry** means all soil conservation forestry or *production forestry*<sup>\*</sup> activities including tracking, earthworks, *land*<sup>^</sup> preparation, planting, pruning, thinning, clearing understorey (indigenous and exotic species), and harvesting.  
[Land Hearing]

*Ernslaw One Ltd ENV-2010-WLG-000146*

*Hancock Forest management (NZ) Limited ENV-2010-WLG-000161*

*Rayonier New Zealand Limited ENV-2010-WLG-000162*

*New Zealand Forest Managers Limited ENV-2010-WLG-000164*

*P F Olsen Limited ENV-2010-WLG-00165*

**Grade Aa biosolids** means a high quality *biosolid*<sup>\*</sup> where the concentration of pathogen and vector attracting compounds has been reduced or removed to provide for *contaminant*<sup>^</sup> concentrations that are at or below the levels specified in Table 4.4 of the Guidelines for the Safe Application of Biosolids to Land in New Zealand, New Zealand Water and Waste Association, August 2003.  
[Water Hearing]

**Grassland** means, for the purposes of Schedule E, an area of vegetation in which the cover of grass in the *canopy*<sup>\*</sup> is 20-100% and in which grass cover, excluding tussock grasses, exceeds the cover of any other growth form or bare ground.  
[Biodiversity and Heritage Hearing]

**Green waste** means organic material including:

- (a) vegetative material, but not tree trunks or limbs larger than 100 mm diameter
- (b) vegetable peelings or trimmings, but no other kitchen wastes
- (c) soil attached to plant roots that may be physically modified but is otherwise in its natural state

but not including animal products (eg., manure, feathers, carcasses) other than as an occasional or incidental input.

[General Hearing & Water Hearing]

**Groundwater Management Zone (GWMZ)** means a Groundwater Management Zone as described in Schedule C.

[Water Hearing]

**Halogenated** in relation to hydrocarbons means hydrocarbons with fluorine, bromine, iodine or chlorine attached.

[General Hearing]

**Hand-held appliance**, for the purposes of the rules regulating the *discharge*<sup>^</sup> of *agrichemicals*<sup>\*</sup>, means an application technique or method for *agrichemical*<sup>\*</sup> use where the application system is non-motorised and the spray being applied is directed only at the target species.

[General Hearing]

**Hapū** means a social, political unit comprised of *whānau*\* each recognising descent from a common ancestor.  
[Te Ao Māori Hearing]

**Hazardous substance** means, unless expressly provided otherwise by regulations prepared under the Hazardous Substances and New Organisms Act 1996, or the RMA, any substance:

- (a) with one or more of the following intrinsic properties:
  - (i) explosiveness
  - (ii) flammability
  - (iii) a capacity to oxidize
  - (iv) corrosiveness
  - (v) toxicity (including chronic toxicity)
  - (vi) ecotoxicity, with or without bioaccumulation, and
- (b) which on contact with air or *water*<sup>^</sup> (other than air or *water*<sup>^</sup> where the temperature or pressure has been artificially increased or decreased) generates a substance with any one or more of the properties specified in (a).

[General Hearing]

**Hazardous waste** means *waste*\* that:

- (a) belongs to one or more categories in Annex I of the *Basel Convention*\*, and
- (b) has one or more of the characteristics in Annex III of the *Basel Convention*\*.

**Health care institution** has the same meaning as in s2(1) of the Health and Disability Commissioner Act 1994.

[General Hearing]

**Heathland** means, for the purposes of Schedule E, an area of vegetation *dominated*\* by species that are slow-growing, stunted, with small, hard, scale-like or needle-like leaves with a thick waxy cuticle, and foliage that is flammable, resistant to decay, and produces acid litter. Heathland which occurs on wet substrates (eg., pakihi) comprises a mixture of *shrubland*\* or *treeland*\* with rush-like species, wire rush and ferns.

[Biodiversity and Heritage Hearing]

**Herbaceous** means, for the purposes of Schedule E and this glossary, plant species that do not form woody tissue. Herbaceous species can be annual or perennial.

[Biodiversity and Heritage Hearing]

**Herbfield** means, for the purposes of Schedule E, an area of vegetation in which the cover of herbs in the *canopy*\* is 20-100% and in which the herb cover exceeds the cover of any other growth form or bare ground. Herbs include all *herbaceous*\* species.

[Biodiversity and Heritage Hearing]

**High temperature hazardous waste incinerator** means an incinerator that is designed and operated principally for burning *hazardous waste*\* at a temperature greater than 850°C as measured:

- (a) near the inner wall of the incinerator, or
- (b) at another point in the combustion chamber where the temperature is likely to represent the temperature in the incinerator.

[General Hearing]

**Hill Country Erosion Management Area** means any area of *land*<sup>^</sup> with a pre-existing *slope*<sup>\*</sup> of 28° or greater on which *vegetation clearance*<sup>\*</sup>, *land disturbance*<sup>\*</sup>, *forestry*<sup>\*</sup> or *cultivation*<sup>\*</sup> is being or is to be undertaken.

[Land Hearing]

**Indigenous** means, for the purposes of Schedule E, vegetation comprised predominantly of indigenous species, but which may include *scattered*<sup>\*</sup> exotic species.

[Biodiversity and Heritage Hearing]

**Interceptor system**, in relation to *discharges*<sup>^</sup> of stormwater, means a facility designed into a stormwater management system with the purpose of:

- (a) preventing deliberate or accidental releases of any *hazardous substances*<sup>\*</sup> in the stormwater system, or
- (b) in the event of stormwater contamination by a *hazardous substance*<sup>\*</sup>, reducing all such substances in the stormwater prior to *discharge*<sup>^</sup> to concentrations that will not result in contamination of either *water*<sup>^</sup> or sediments to such a degree that is likely to result in significant adverse *effects*<sup>^</sup> on *aquatic life*<sup>^</sup> or on the suitability of the *water*<sup>^</sup> for potable *water*<sup>^</sup> supply.

[Water Hearing]

**Iwi** means a political grouping comprised of several *hapū*<sup>\*</sup>, each recognising descent from a common ancestor(s). The *hapū*<sup>\*</sup> not only recognise genealogical ties but geographical, political and social ties. Today *iwi*<sup>\*</sup> are represented by many organisations, including trust boards, *rūnanga* and *iwi authorities*<sup>^</sup>, but only in specific areas where the mandate to do so has been given by the constituent *hapū*<sup>\*</sup>.

[Te Ao Māori Hearing]

**Iwi management plan** means a relevant planning document recognised by an *iwi authority*<sup>^</sup> and lodged with the Regional Council.

[Te Ao Māori Hearing]

**Kōiwi** means human skeletal remains.

[Biodiversity and Heritage Hearing]

**Land disturbance** (see *Vegetation clearance*<sup>\*</sup>).

[Land Hearing]

**Landfill** means a *site*<sup>\*</sup> where *waste*<sup>\*</sup> is disposed of by burying it, or placing it upon *land*<sup>^</sup> or other *waste*<sup>\*</sup>, but excludes a farm dump.

[General Hearing & Water Hearing]

**Land use capability class (LUC)** means a classification of a parcel of *land*<sup>^</sup> in terms of five characteristics or attributes (rock, soil, *slope*<sup>\*</sup>, erosion, vegetation). The land use capability class can be derived either from the New Zealand Land Resource Inventory (NZLRI) or by a suitably qualified person specifically assessing and mapping the land use capability classes for a particular parcel of *land*<sup>^</sup>. Where the LUC is assessed by a suitably qualified person, that person may use the more favourable classification of the *land*<sup>^</sup> available applying the 3<sup>rd</sup> or 2<sup>nd</sup> edition of the Land Use Capability Survey Handbook.

[Water Hearing]

**Lichenfield** means, for the purposes of Schedule E, an area of vegetation in which the cover of lichens in the *canopy*<sup>\*</sup> is 20-100% and in which the lichen cover exceeds the cover of any other growth form or bare ground.

[Biodiversity and Heritage Hearing]

**Light fuel oil** means petroleum distillate fuel that is used in liquid fuel-burning equipment and does not require preheating.  
[General Hearing]

**Maintenance** means all actions which have the objective of retaining or restoring a *structure*<sup>^</sup>, system, facility or installation in or to a state in which it can perform its required function, provided *maintenance*<sup>\*</sup> actions themselves do not give rise to any significant adverse *effects*<sup>^</sup>, and where the character, intensity and scale of the adverse *effects*<sup>^</sup> of the *structure*<sup>^</sup>, system, facility or installation remain the same or similar. *Maintenance*<sup>\*</sup> includes:

- (a) the reconstruction, alteration, removal or demolition of a *structure*<sup>^</sup> or part of a *structure*<sup>^</sup>, system, facility or installation
- (b) trimming and removal of vegetation encroaching on a *structure*<sup>^</sup>, system, facility or installation
- (c) the erection and removal of a temporary *structure*<sup>^</sup>, system, facility or installation
- (d) the maintenance of access to a *structure*<sup>^</sup>, system, facility or installation
- (e) the maintenance of a *track*<sup>\*</sup>

[General Hearing & Land Hearing]

**MALF** means the one-day mean annual low flow calculated as the average of the lowest flow of the *river*<sup>^</sup> for each year (1 July to 30 June) of record.  
[Water Hearing]

**Mana** means legitimacy to act in an authoritative and responsible capacity: prestige.  
[Te Ao Māori Hearing]

**Mauri** means essential life force or principle; a metaphysical quality inherent in all things, both animate and inanimate.  
[Te Ao Māori Hearing]

**Mossfield** means, for the purposes of Schedule E, an area of vegetation in which the cover of mosses in the *canopy*<sup>\*</sup> is 20-100% and in which the moss cover exceeds the cover of any other growth form or bare ground.  
[Biodiversity and Heritage Hearing]

**Natural capital** means the potential animal stocking rate that can be sustained by a legume-based pasture fixing nitrogen biologically, under optimum management and before the introduction of additional technologies. Using the “Attainable Physical Potential” in stock units/ha for each land unit listed in the extended legend of the *LUC*<sup>\*</sup> worksheets as a proxy for the soil’s natural capital, these stocking rates are transformed to pasture production and used in the OVERSEER<sup>®</sup> nutrient budget model to calculate nitrogen leaching losses under a pastoral use.  
[Water Hearing]

**New tracking** means the formation of a new *track*<sup>\*</sup> but excludes:

- (a) the installation of water table drains and cross-*track*<sup>\*</sup> culverts for an existing *track*<sup>\*</sup>
- (b) tracking undertaken to link existing *tracks*<sup>\*</sup> or access ways provided the length of linkage tracking is less than 100 m.

[Land Hearing]

**New Zealand Threat Classification System and Lists** means the threat classification systems and threatened species described in any of the following documents:

- (a) de Lange, P.J., Norton, D.A., Heenan, P.B., Courtney, S.P., Molloy, B.P.J., Ogle, C.C., Rance, B.D., Johnson, P.N. & Hitchmough, R. 2004. Threatened and uncommon plants of New Zealand. *New Zealand Journal of Botany* 42: 45-76.
- (b) Hitchmough, R., Bull, L., Cromarty, P. (comps) 2007. *New Zealand Threat Classification System Lists 2005*. Science and Technical Publishing No. 236. Department of Conservation, Wellington.
- (c) Molloy, J., Bell, B., Clout, M., de Lange, P., Gibbs, G., Given, D., Norton, D., Smith, N., & Stephens, T. 2002. *Classifying Species According to Threat of Extinction*. Biodiversity Recovery Unit, Department of Conservation, Wellington.
- (d) Townsend, A.J., de Lange, P.J., Duffy, C.A.J., Miskelly, C.M., Molloy, J., Norton, D.A. 2008. *New Zealand Threat Classification System manual*. Science & Technical Publishing. Department of Conservation. Wellington.

[Biodiversity and Heritage Hearing]

**Noa** means a state of normality or balance.

[Te Ao Māori Hearing]

**Nutrient management plan** means a plan prepared annually in accordance with the Code of Practice for Nutrient Management (NZ Fertiliser Manufacturers' Research Association 2007) which records (including copies of the OVERSEER<sup>®</sup> input and output files used to prepare the plan) and takes into account all sources of nutrients for *dairy farming*\* and identifies all relevant nutrient management practices and mitigations, and which is prepared by a person who has both a Certificate of Completion in Sustainable Nutrient Management in New Zealand Agriculture and a Certificate of Completion in Advanced Sustainable Nutrient Management from Massey University.

[Water Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Occasional** means, for the purposes of Schedule E and this glossary, species that contribute more than *scattered*\* species, but less than species which are *common*\*, *abundant*\* or *dominant*\* and are encountered infrequently within the area of interest. This is a measure of the contribution to an area of interest (eg., the same habitat type or forest tier) of a species in relation to other species in the same area, and is not simply a frequency count as both biomass and density of a given species are considered.

[Biodiversity and Heritage Hearing]

**Oil** means petroleum in any form other than gas and includes crude oil, fuel oil sludge, oil refuse and refined oil products (eg., diesel fuel, kerosene, light fuel and motor gasoline).

[General Hearing & Water Hearing & Coast Hearing]

**Outdoor burning** means the burning of materials other than in purpose-built fuel-burning equipment designed to control the combustion process. Outdoor burning includes burning in drums and backyard rubbish incinerators, barbecues, hāngi, umu and outdoor fireplaces.

[General Hearing]

**Operation** means the use of any *structure*<sup>^</sup>, system, facility or installation, including ancillary resource use.

[General Hearing]

**Operational plan** means, for the purposes of Chapter 12, an operational plan to minimise any potential adverse *effects*<sup>^</sup> on any *rare habitat*<sup>\*</sup>, *threatened habitat*<sup>\*</sup> or *at-risk habitat*<sup>\*</sup> resulting from *forestry*<sup>\*</sup>. The operational plan must be prepared in accordance with Part 3, take into account the Ecological values in Part 2 Section 5, and comply with the Best Environmental Management Practices in Part 1, of the New Zealand Environmental Code of Practice for Plantation Forestry Version 1.

[Land Hearing]

*Ernslaw One Ltd ENV-2010-WLG-000146*  
*Hancock Forest management (NZ) Limited ENV-2010-WLG-000161*  
*Rayonier New Zealand Limited ENV-2010-WLG-000162*  
*New Zealand Forest Managers Limited ENV-2010-WLG-000164*  
*P F Olsen Limited ENV-2010-WLG-00165*

**Persistent organic pollutants (POP)** are organic substances that:

- (a) demonstrate toxic properties
- (b) resist degradation
- (c) bioaccumulate
- (d) can undergo a long-range transfer in air and *water*<sup>^</sup>
- (e) have a potential harmful *effect*<sup>^</sup> on health or the *environment*<sup>^</sup> including accumulating in living organisms and the food chain.

Examples include pesticides (such as DDT), industrial chemicals (such as polychlorinated biphenyls - PCBs) and unintentional by-products of industrial processes (such as dioxins and furans).

[General Hearing]

**PM<sub>10</sub>** means particulate matter that is:

- (a) less than 10 microns in aerodynamic diameter
- (b) measured in accordance with the United States Code of Federal Regulations, Title 40 – Protection of Environment, Volume 2, Part 50, Appendix J - Reference method for the determination of particulate matter as *PM<sub>10</sub>*<sup>\*</sup> in the atmosphere.

[General Hearing]

**Podocarp** means, for the purposes of Schedule E, southern hemisphere conifer species which have cones modified into fleshy berry-like structures but do not have flowers. Podocarp species include, but are not limited to, the totara species, matai, miro, kahikatea and rimu.

[Biodiversity and Heritage Hearing]

**Poultry farm litter** means solid poultry manure, bedding and composted material from poultry farm sheds.

[Water Hearing]

**Production forestry** means a *forest*<sup>\*</sup> of selected species of trees that are specifically planted, managed and harvested for the production of timber or other wood-based products, and includes understorey that has established beneath the *canopy*<sup>\*</sup> and areas that are demonstrated to be failed plantings from the previous rotation.

[Land Hearing]

*Rayonier New Zealand Limited ENV-2010-WLG-000162*  
*New Zealand Forest Managers Limited ENV-2010-WLG-000164*  
*P F Olsen Limited ENV-2010-WLG-00165*

**Property** means one or more adjacent *allotments*<sup>^</sup> that are in the same ownership. A legal *road*<sup>^</sup> is considered a property for the purposes of this Plan.

[Overall Plan Hearing]

**Public land** means *land*<sup>^</sup> to which the public has free access at the time that an activity is undertaken.

[General Hearing]

**Public road** means any formed legal *road*<sup>^</sup> that has open public access. It includes both the road area normally used by motor vehicles and cyclists along with adjacent footpaths and any berms and verges not in private ownership.

[General Hearing]

**Public water supply** means a reticulated publicly or privately owned drinking *water*<sup>^</sup> supply connecting at least two buildings and serving at least 1,500 person days per year (eg., 25 people for at least 60 days per year). Drinking *water*<sup>^</sup> is *water*<sup>^</sup> intended to be used for human consumption, food preparation, utensil washing, oral hygiene or personal hygiene.

[Water Hearing]

**Rāhui** means a social system of prohibition which recognises the tapu state of a resource, or is used as a voluntary device to ensure sensible management of a resource.

[Te Ao Māori Hearing]

**Rare habitat** means an area determined to be a rare habitat in accordance with Schedule E and, for the avoidance of doubt, excludes any area in Table E.2(b).

[Biodiversity and Heritage Hearing]

*Meridian Energy Limited ENV-2010-WLG-000149*

**Reasonable mixing**, in relation to the *discharge*<sup>^</sup> of *contaminants*<sup>^</sup> into a *river*<sup>^</sup> or an *artificial watercourse*<sup>\*</sup>, means either:

- (a) a distance downstream of the *discharge*<sup>^</sup> that is the least of:
  - (i) the distance that equals seven times the width of the *river*<sup>^</sup> at the point of *discharge*<sup>^</sup> when the flow is at half the median flow, or
  - (ii) 200 metres from the point of *discharge*<sup>^</sup> or, for *discharges*<sup>^</sup> to *artificial watercourses*<sup>\*</sup>, 200 metres from the point of *discharge*<sup>^</sup> or the *property*<sup>\*</sup> boundary, whichever is the greater, or
  - (iii) the point at which mixing of the particular *contaminant*<sup>^</sup> concerned has occurred across the full width of the body of *water*<sup>^</sup> in the *river*<sup>^</sup>, *artificial watercourse*<sup>\*</sup>, or
- (b) a distance for *reasonable mixing*<sup>\*</sup> determined as appropriate for a consent application where special circumstances apply.

[Water Hearing & Coast Hearing]

**Rohe** means tribal district or tribal area.

[Te Ao Māori Hearing]

**Rua kōiwi** means a *site*<sup>\*</sup> where human skeletal remains are traditionally placed.

[Te Ao Māori Hearing]

**Rushland** means, for the purposes of Schedule E, an area of vegetation in which the cover of rushes in the *canopy*<sup>\*</sup> is 20-100% and in which the rush cover exceeds the cover of any other growth form or bare ground. Rush species include, but are not limited to, some species of *Juncus*, *Apodasmia*, and all species of *Sporadanthus* and *Empodisma*, but exclude tussock rushes.

[Biodiversity and Heritage Hearing]

**Scattered** means, for the purposes of Schedule E and this glossary, species that contribute less than species which are *occasional\**, *common\**, *abundant\** or *dominant\** and can be expected to be encountered infrequently, and with a sparse distribution within the area of interest. This is a measure of the contribution to an area of interest (eg., the same habitat type or forest tier) of a species in relation to other species in the same area, and is not simply a frequency count as both biomass and density of a given species are considered.

[Biodiversity and Heritage Hearing]

**Scrub** means, for the purposes of Schedule E and this glossary, an area of woody vegetation in which the cover of *trees\** and *shrubs\** in the *canopy\** is greater than 80% and in which the *shrub\** cover exceeds that of *trees\**.

[Biodiversity and Heritage Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Sea level rise** is the net rise in sea level relative to the *land^* of the Region.

[General Hearing]

**Seawater Management Zone** (see *Water Management Zone\**).

[Coast Hearing]

**Sedgeland** means, for the purposes of Schedule E, an area of vegetation in which the cover of sedges in the *canopy\** is 20-100% and in which the sedge cover exceeds that of any other growth form or bare ground. Sedge species include, but are not limited to, many species of *Carex*, *Uncinia* and *Bolboschoenus*. Tussock-sedges and reed forming sedges are excluded from this definition of sedgeland.

[Biodiversity and Heritage Hearing]

**Shrub** means, for the purposes of Schedule E and this glossary, a woody plant less than 10 cm diameter at 1.4 m above ground.

[Biodiversity and Heritage Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Shrubland** means, for the purposes of Schedule E and this glossary, an area of woody vegetation in which the cover of *shrubs\** in the *canopy\** is 20-80% and in which the *shrub\** cover exceeds the cover of any other growth form or bare ground.

[Biodiversity and Heritage Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Site** includes, where in the context it is appropriate, an area or place or *river^* reach.

[Te Ao Māori Hearing & Biodiversity and Heritage Hearing & Water Hearing]

**Slash** means any discarded vegetation resulting from *forestry\** pruning, thinning, clearing understorey, or harvesting.

[Land Hearing]

**Slope** is the angle from horizontal and is measured in degrees to an accuracy no less than that achieved by a hand-held inclinometer or abney level.

[Land Hearing]

**Soil conditioner** means a substance, excluding any substance or mix of substances derived from animal tissue, bone or blood whether processed or not, applied to *land^* by itself or with *fertiliser\**, that alters the physical/structural characteristics of the soil by:

- (a) altering the air or *water^* retention capacity
- (b) encouraging flocculation
- (c) discouraging compacting

(d) increasing the biological activity of soil or

(e) facilitating air circulation and drainage

but does not include *fertiliser\**, *biosolids\**, *animal effluent\** or *poultry farm litter\**.

[Water Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Solid fuel** means a solid substance that releases useable energy when burnt (eg., wood and coal).

[General Hearing]

**Solid waste** means the combination of domestic, industrial and commercial *waste\** and is also known as *community waste\**.

[General Hearing]

**Spray drift** means the airborne movement of any sprayed *agrchemical\** as vapour, aerosol or droplets onto non-target areas.

[General Hearing]

**Supplementary *water*<sup>^</sup> allocation take** means, in relation to the taking of *water*<sup>^</sup> from a *river*<sup>^</sup>, a take granted consent in accordance with Policy 6-18 or any preceding supplementary *water*<sup>^</sup> allocation regime.

[Water Hearing]

**Taonga** means all things prized or treasured, both tangible and intangible.

[Te Ao Māori Hearing]

**Threatened habitat** means an area determined to be a threatened habitat in accordance with Schedule E and, for the avoidance of doubt, excludes any area in Table E.2(b).

[Biodiversity and Heritage Hearing]

*Meridian Energy Limited ENV-2010-WLG-000149*

**Track** means a formed route for the movement of people, animals or vehicles and includes a *road*<sup>^</sup> but excludes any route formed solely by the walking of people or animals.

[Land Hearing]

**Treated timber** means timber treated with preservatives, including boron compounds (except 2-thiocyanomethylthiobenzothiazole (TCMTB) compounds), copper chromium arsenic (CCA), or creosote, but not including timber treated only with anti-sapstain compounds.

[General Hearing]

**Tree** means, for the purposes of Schedule E and this glossary, a woody plant with a diameter of 10 cm or greater at 1.4 m above ground and includes a tree fern with a diameter of 10 cm or greater at 1.4 m above ground.

[Biodiversity and Heritage Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*

**Treeland** means, for the purposes of Schedule E and this glossary, an area of vegetation in which the cover of *trees\** in the *canopy\** is 20-80%, with *tree\** cover exceeding the cover of any other growth form, and in which the *trees\** form a *discontinuous\** upper canopy above either a lower canopy of predominantly non-woody vegetation or bare ground. *Treeland\** excludes orchard trees. (Note: An area of vegetation consisting of *trees\** above *shrubs\** is classified as either *forest\** or *scrub\** depending on the proportion of *trees\** and *shrubs\** in the *canopy\**).

[Biodiversity and Heritage Hearing]

**Tussockland** means, for the purposes of Schedule E and this glossary, an area of vegetation in which the cover of tussocks in the *canopy*\* is 20-100% and in which the tussock cover exceeds the cover of any other growth form or bare ground. Tussocks include all grasses, sedges, rushes and other herbaceous plants with linear leaves (or linear non-woody stems) that are densely clumped and are greater than 10 cm in height. This includes, but is not limited to, all species of *Cortaderia*, *Gahnia* and *Phormium* (see also *Flaxland*\*) and some species of *Chinochloa*, *Poa*, *Festuca*, *Rytidosperma*, *Cyperus*, *Carex*, *Uncinia*, *Juncus*, *Astelia*, *Aciphylla* and *Celmisia*.

[Biodiversity and Heritage Hearing]

*The Chief of the New Zealand Defence Force ENV-2010-WLG-000144*

**Untreated wood** means any wood material or product, including sawdust, which is not treated with copper chromium arsenic (CCA) (or “tanalised”), or with any organochlorine preservative.

[General Hearing]

**Upgrade** means bringing a *structure*^, system, facility or installation up to date or to improve its functional characteristics, provided the upgrading itself does not give rise to any significant adverse *effects*^, and the character, intensity and scale of any adverse *effects*^ of the upgraded *structure*^, system, facility or installation remain the same or similar.

[General Hearing & Land Hearing]

**Untreated human effluent** means sewage which:

- (a) has undergone no treatment; or
- (b) has only undergone changes to its physical properties as a result of:
  - (i) screening, including millscreening;
  - (ii) comminution;
  - (iii) grit removal;
  - (iv) settlement; or
  - (v) any combination of the above.

[Water Hearing]

**Vegetation clearance** means the cutting, crushing, spraying, burning, or other means of removal or destruction of vegetation, including indigenous and exotic plants (including trees). **Land disturbance** means the disturbance of the *land*^ surface by any means including by blading, blasting, contouring, cutting of batters, filling, excavating, ripping, root raking, recontouring, or moving or removing soil or earth. *Vegetation clearance*\* and *land disturbance*\* excludes:

- (a) *cultivation*\*
- (b) *forestry*\*
- (c) clearance or disturbance by animals including grazing
- (d) activities undertaken for the sole purpose of establishing a fence line and not located within a *rare habitat*\*, *threatened habitat*\* or *at-risk habitat*\*
- (e) the *maintenance*\* or *upgrade*\* of existing *tracks*\*, *structures*^ (including fences), or *infrastructure*^
- (f) maintaining shelterbelts (including cutting of shelterbelt roots)
- (g) activities undertaken for the purpose of protecting, maintaining or enhancing areas of *rare habitat*\*, *threatened habitat*\* or *at-risk habitat*\*
- (h) clearance of vegetation that is fallen or dead and not located within a *rare habitat*\*, *threatened habitat*\* or *at-risk habitat*\* that is *forest*\* or *scrub*\* in Schedule E
- (i) activities undertaken within the boundaries of any area of *land*^ held or managed under the Conservation Act 1987 or any other Act specified in

Schedule 1 to that Act (other than *land*<sup>^</sup> held for administrative purposes) that are consistent with a conservation management strategy, conservation management plan, or management plan established under the Conservation Act 1987 or any other Act specified in Schedule 1 to that Act

- (j) activities undertaken within the boundaries of the New Zealand Defence Force Waiouru Military Training Area, provided that those activities are undertaken in accordance with a management plan that has the same or similar outcome as an *Erosion and Sediment Control Plan*<sup>\*</sup>
- (k) clearance of thistles, ring ferns, carpet ferns, rushes, ink weed, briar rose, barberry, introduced pampas grass (other than toetoe), mingimingi, wilding pinus species, Japanese poplar, Japanese walnut, and pest plants referred to in the Regional Council's Regional Pest Plant Management Strategy.

[Land Hearing & Biodiversity and Heritage Hearing]

*New Zealand Transport Agency ENV-2010-WLG-000153 [Land Disturbance]*

*Horticulture New Zealand ENV-2010-WLG-000155 [Vegetation Clearance]*

*The Chief of the New Zealand Defence Force ENV-2010-WLG-00144 [Infrastructure]*

**Wāhi tapu** means a *site*<sup>\*</sup> sacred to Māori in the traditional, spiritual, religious, ritual, or mythological sense and includes *rua kōiwi*<sup>\*</sup>.

[Te Ao Māori Hearing]

**Wāhi tūpuna** means a *site*<sup>\*</sup> of cultural and historical significance to *hapū*<sup>\*</sup> or *iwi*<sup>\*</sup> – though not necessarily in a state of tapu.

[Te Ao Māori Hearing]

**Waste** means any material, solid, liquid or gas that is unwanted or unvalued and discarded or discharged.

[General Hearing]

**Wet abrasive blasting** means *abrasive blasting*<sup>\*</sup> when *water*<sup>^</sup> or a mixture of abrasive and *water*<sup>^</sup> is added to the airflow carrying the abrasive material prior to the blasting nozzle exit, or when the blasting medium is predominantly a pressurised slurry.

[General Hearing]

**Water Management Zone** means a Water Management Zone as described in Schedule AA or the Seawater Management Zone as described in Schedule H.

[Overall Plan Hearing & Water Hearing & Coast Hearing]

**Water Management Sub-zone or Sub-zone (WMSZ)** means a Water Management Sub-zone as described in Schedules AA or H.

[Overall Plan Hearing & Water Hearing & Coast Hearing]

**Whānau** means family or extended family.

[Te Ao Māori Hearing]

**Whenua** means land.

[Te Ao Māori Hearing]

**Whitebait** means the assemblage of juvenile indigenous fish which migrate into *river*<sup>^</sup> systems from the sea, generally during spring. This assemblage can include juvenile inanga, shortjaw kokopu, giant kokopu, banded kokopu, koaro and occasionally common smelt.

[Water Hearing]

**Woodburner** means a domestic heating appliance that burns wood, but does not include:

- (a) an open fire
- (b) a multi-fuel heater, a pellet heater, or a coal burning heater
- (c) a stove that is designed and used for cooking and is heated by burning wood.

[General Hearing]

**Woody vegetation** means perennial vegetation that has hard lignified tissues.

[Land Hearing]

*Horticulture New Zealand ENV-2010-WLG-000155*